

PCT/GB04/03204



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

RECEIVED

16 AUG 2004


WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

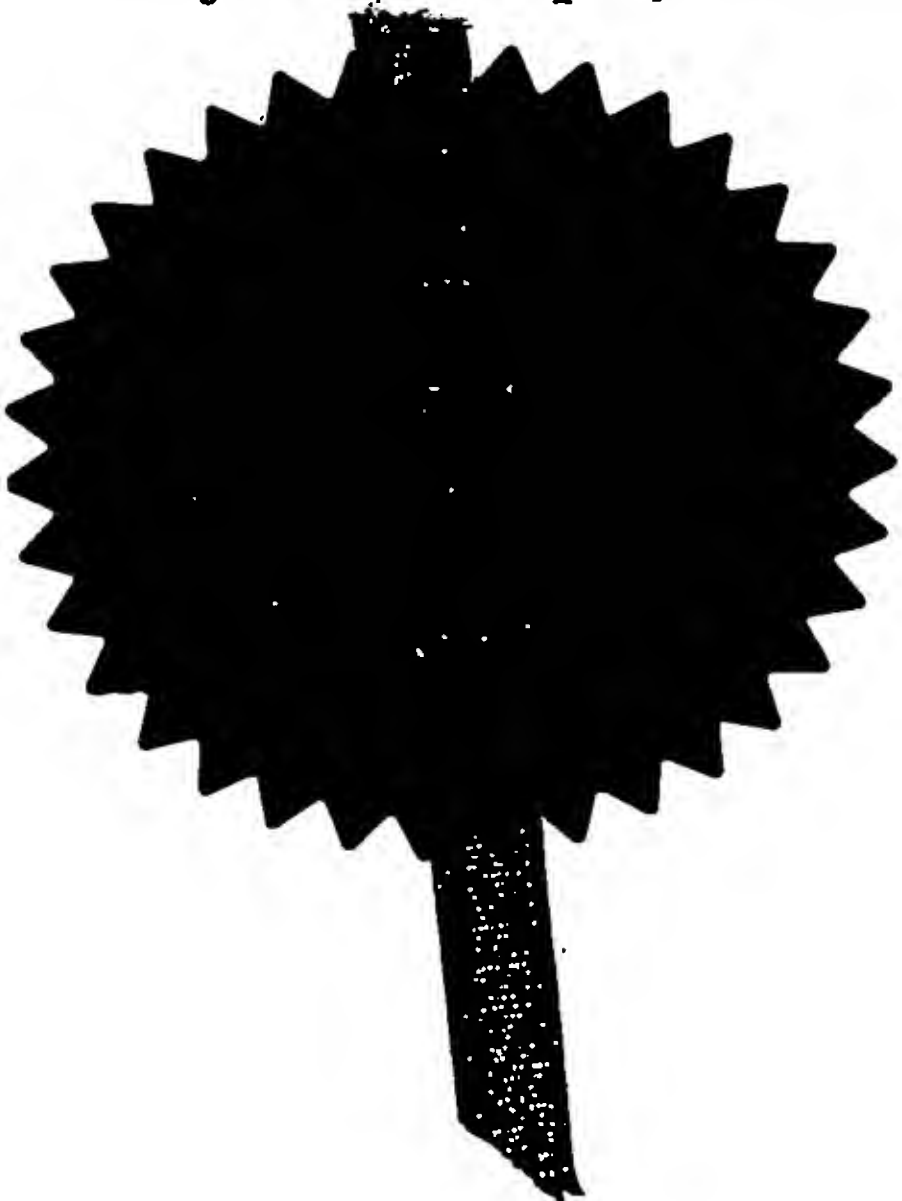

Signed

Stephen Hordley

Dated 4 August 2004

BEST AVAILABLE COPY



05AUG03 E827716-4 D02855
P01/7700 0.00-0318241.7

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference 2/P40028GB

04 AUG 2003

0318241.7

2. Patent application number
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Pall Corporation
2200 Northern Boulevard
East Hills, NY 11548, United States of America

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

USA/New York

657166005

4. Title of the invention

Separator System

5. Name of your agent (if you have one)

Mathisen, Macara & Co
The Coach House
6-8 Swakeleys Road
Ickenham
Uxbridge
UB10 8BZ

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it) 1073001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 9

Claim(s) 3

Abstract 1

Drawing(s) 3 + 3 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1


Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

5 August 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Stephen Knott (01895 678331)

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

SEPARATOR SYSTEMS

The invention relates to separator systems and, more particularly, separator systems for use with engines.

5

Engines, whether gas turbine engines, petrol engines or diesel engines, require combustion air which is normally delivered to the engine through an inlet. It is important for such inlet air to be relatively free of particulates since, if fed to the engine, particulates can have a damaging effect on the engine. It is customary therefore, to position a barrier filter in the inlet to remove particulates from the air. Barrier filters are, however, only satisfactory where the volume of particulates is not great. In environments where the volume of particulates is significant, barrier filters will clog quickly and thus need replacement at short intervals which is unsatisfactory.

15

It is known for use in such hostile environments where air contains high volumes of particulates, to use inertial separators to remove particulates. An example of this is shown in GB-A-2324484. Each separator comprises a tubular body containing a vortex generator and leading to an outlet member. A gap between an exit to the tubular body and the outlet allows particulates spun to the internal surface of the body to exit the separator.

20

A plurality of such separators are mounted side by side in a housing with their ends in register. A scavenge flow is passed through the housing to remove particulates exiting the separators. As seen in GB-A-2324484, it is known to provide two such stages arranged in succession in the flow path of the particulate-laden inlet air to increase removal efficiency.

25

The presence of inertial separators in the path of an air flow produces a significant pressure drop in the flow. For this reason, it has not previously been possible to achieve required particulate removal efficiencies using only inertial

30

separators. In general, it has been necessary to limit the number of inertial separator stages used and obtain required removal rates by the use of a downstream barrier filter.

- 5 According to a first aspect of the invention, there is provided a separator system for separating particulates from air flowing in a path comprising two or more separator stages arranged in succession in the direction of flow of air in said path, each stage including a respective housing containing a plurality of side-by-side inertial separators through which said air flows, the additional total
10 pressure drop produced by each separator stage after the first separator stage being less than the additional total pressure drop produced by the preceding separator stage in an upstream direction.

According to a second aspect of the invention, there is provided an air intake
15 for an engine including a separator system according to the first aspect of the invention.

According to a third aspect of the invention, there is provided an engine including an air intake according to the second aspect of the invention.

20

The following is a more detailed description of an embodiment of the invention, by way of example, reference being made to the accompanying drawings in which:-

25 Figure 1 is a schematic perspective view of a separator system including three separator stages,

Figure 2 is a longitudinal cross section of part of one stage of the separator system of Figure 1, and

Figure 3 is a schematic perspective view of an air intake of the kind
30 shown in Figures 1 and 2 acting as an air intake for internal combustion engine including a turbocharger.

Referring first to Figures 1 and 2, the separator system comprises a housing 10 containing three separator stages 11, 12, 13 and a barrier filter 14.

5 The housing 10, which may be made of metal, comprises a duct formed by four generally rectangular walls 15a, 15b, 15c and 15d with an inlet wall 16 at one end and a converging outlet duct 17 at the other end ending in a cylindrical or equivalent area outlet 18. A scavenge plenum 19 communicates with the interior of the housing through one of the walls 15d and includes a scavenge
10 outlet 20. Another wall includes a scavenge air inlet (not shown).

The inlet wall is provided with inlet apertures 21 and, as indicated by the arrows, air enters the housing 10 through the air inlet apertures 21, passes through the interior of the housing and leaves through the outlet duct 17 and the
15 outlet 18.

The separator stages 11, 12, 13 share common features. These common features will now be described with reference to the first separator stage 11 as seen in Figure 2 but it will be understood that corresponding features are found
20 in the second stage 12 and the third stage 13.

The first separator stage 11 comprises a housing 22 formed by a front panel 23 and a parallel rear panel 24. The front and rear panels 23 24 are interconnected by side walls 25. A plurality of inertial separators 26 extend between the front
25 panel 23 and the rear panel 24. Each inertial separator 26 that is of generally known type as shown, for example, in GB-A-1207028. Such an inertial separator comprises a tubular body 27 having a central passage 28, an inlet 29 and an outlet 20. A vortex generator 31 is disposed within the central passage 28. The vortex generator 31 may be made of any suitable materials such as
30 plastics or metal and moulded or bonded in position in the passage 28. The vortex generator 31 has helical vanes 32 surrounding a cylindrical hub 33. The

body 27, the vortex generator 31 and the hub 33 may be moulded as a single item.

5 A generally diverging tubular outlet member 34 has an inlet 35 and an outlet 36. The outlet member 34 is coaxial with the passage 28 and has the inlet 35 extending into the outlet end 30 of the passage 28. The outer diameter of the inlet 25 of the outlet member 34 is less than the inner diameter of the passage outlet 30. There is thus an annular space 37 formed between the outlet 30 of the passage 28 and the outer surface of the inlet 35 of the outlet member 34.

10

Each inertial separator 26 is mounted between the front panel 23 and the rear panel 24 with the passage inlet 29 in register with the corresponding inlet in the front panel and with the outlet 36 of the outlet member 34 in register with an outlet in the rear panel 24. The space 37 communicates with the interior of the housing 22.

15

The interior of each housing 23 of the separator stages 11, 12, 13 is connected to a supply of scavenge air (not shown). The supply includes a manifold (not shown) which receives air and distributes the scavenge air to the housing 22 of the three separator stages 11, 12, 13. The air passes through the housing 22 and then leaves the housing 22 to pass into the scavenge plenum 19 and then to the scavenge outlet 20.

20

The barrier filter 14 is arranged in the housing 10 downstream of the third separator stage 13. The barrier filter 14 is of known type and may be a flat panel filter, or a circular cartridge type element or a bi-pleat type element.

25

Referring to Figure 3, in which parts common to Figures 1 and 2 and to Figure 3 are given the same reference numerals and are not described in detail, there is shown a separator system of the general type described above with reference to Figures 1 to 2 installed as an air intake for an internal combustion engine 38

30

including a turbo charger 39. In this embodiment, the outlet duct 17 extends at an acute angle relative to the path of flow of air through the separator stages 11, 12, 13 and the barrier filter 14. The outlet 18 to the outlet duct 17 is connected to an inlet 40 to the turbo charger 39. There is an interrupted flow path between this outlet 18 and the turbo charger inlet 14 with, for example, no filter in this path. An outlet 41 to the turbo charger 39 is connected to an air inlet 42 of the engine 38. Figure 3 also shows three scavenge air inlets 43 each communicating with a respective separator stage 11, 12, 13. The scavenge air supply system is not shown in this Figure.

10

The arrangement of the separator system described above with reference to the drawings is for removing particulates from air supplied to the engine 38. It removes more than 99.5% and preferably more than 99.7% of all particles greater than 5 microns and preferably greater than 2 microns. It may achieve this in an environment where the requirement for air by the engine may be in excess of 85m³/min and where the weight particulates removed may be in excess of 8kg/hr.

The separator system described above with reference to the drawings achieves this by use of the first second and third separator stages 11, 12, 13 alone. Although the barrier filter 14 is present, it is effective only when there is a failure of one or more of the separator stages 11, 12, 13 by failure of the scavenge system.

While it is in principle possible to achieve very high particulate removal rates with inertial separators, they suffer from the disadvantage that, as particulate removal efficiencies increase there is an increased pressure drop across each separator stage. This means that, previously, it has not been possible to provide particulate removal rates of 99.7% and better solely by the use of separator stages. Historically, it has been necessary to use no more than two

30

separator stages – bearing in mind that the pressure drops are cumulative – and also to use a downstream barrier filter to achieve required removal efficiencies.

In the separator system described above with reference to the drawings, the required efficiency of particulate removal is achieved solely by the use of separator stages with, in the present case, three stages being provided. This is achieved by ensuring that each stage after the first adds a pressure drop to the overall pressure drop that is less than the preceding stage. Thus the cumulative pressure drop across the first and second stages is less than twice the pressure drop across the first stage alone and the cumulative pressure drop across the first, second and third stages is less than 1.5 times the cumulative pressure drop across the first and second stages. For example, the first stage may have a pressure drop of 12mb, the second stage may add 10mb and the third stage may add 8mb. This is achieved in the following ways.

First, the pitch of the vanes 32 of the vortex generators 31 in the first separator stage 11 is greater than the pitch of the vanes 32 of the vortex generators 31 of the second separator stage 12 which in turn is greater than the pitch of the vanes 32 in the vortex generators 31 of the third separator stage 13. For example, the pitch in the first separator stage 11 may be 48mm in the second stage 38mm and in the third stage 33mm. Thus the cumulative pressure drop across each separator stage increases in a downstream direction. The effect of this is that the pressure drop is lowest across the first separator stage 11 where the majority of the particulate material is removed. For example, the first separator stage may remove 97.5% of particulates. In the second stage 12, where the pressure drop across the first and second stages 11, 12 is higher, this efficiency may increase to 98.5% to 99%. In the third separator stage 13, where the pressure drop across the first, second and third stages 11, 12, 13 is highest, the final removal efficiency is greater than 99.5% and preferably greater than 99.7% is achieved.

in addition, the volume of scavenge air passed through each housing 22 increases between the separator stages 11, 12, 13 in a downstream direction. For example, the scavenge flow in the first separator stage may be 15% of the main flow in the second separator stage 12, 10% of the main flow and in the 5 third separator stage 13, 5% of the main flow. Thus, the inlet will draw in 130% of the required engine inlet flow. The effect of increasing the scavenge flow is to increase the efficiency of scavenge removal and also to increase the cumulative pressure drop.

10 Further, the number of inertial separators 26 varies between the three stages. There are most inertial separators 26 in the first separator stage 11, less in the second separator stage 12 and least in the third separator stage 13. For example, each stage may have, in relation to the succeeding stage in a downstream direction, between 5% and 30% more inertial separators. In one 15 embodiment, there may be 120 inertial separators 26 in the first separator stage 11, 110 inertial separators 26 in the second separator stage 12 and 100 inertial separators 26 in the third separator stage 13.

The spacing between the first separator stage 11, the second separator stage 12, 20 the third separator stage 13 and the barrier filter 14 is also adjusted to optimise the removal efficiency and control the pressure drop between the separator stages 11, 12, 13. For example, the separation between the first separator stage 11 and the second separator stage 12 may be less than the separation between the second separator stage 12 and the third separator stage 13. The barrier filter 25 14 may be separated from the third separator stage 13 by a multiple of the distance between the second separator stage 12 and the third separator stage 13. Separation between the separator stages 11, 12, 13 may vary between 6mm and 100mm. The distance between the third separator stage 13 and the barrier filter 14 will depend on the installation of space envelope, the barrier filter 30 configuration and internal airflow dynamics. Similar considerations will

govern the spacing between the barrier filter 14 and the entrance to the outlet ducts 17.

5 In use, inlet air is fed to the housing 10. A proportion of the inlet air is bled and sent to the scavenge manifold (not shown). The remaining air enters the housing through the inlet wall 16 and passes through the inertial separator 6 in the first separator 11. The air will be carrying particulate materials such as dust and other debris including grit sand and stones. Each vortex generator 31 of each inertial separator 26 generates a vortex that forces the particulate material to the periphery of the associated passage 28, so leading the air at the centre relatively clean. The portion of the airflow at the periphery, which is carrying the particulate material, exits through the annular space 27 into the associated housing 22. The central core of clean air passes through the outlet member 34 into the space between the first separator stage 11 and the second separator stage 12. The particulate material that passes through the annular space 37 into the housing 22 is removed by the scavenge air to the scavenge planar 19 and passed to the scavenge outlet 20.

20 A similar process takes place in the second separator stage 12 and the third separator stage 13.

As mentioned above, the barrier filter 14 is present only for emergency use and so, when all three separator stages 11, 12, 13 are functioning, it will extract only minimal particulate material from the air exiting the third separator stage 13. The relatively clean air, which may, as described above, have 99.5% or preferably 99.7% of all particulate material greater than 5 microns and preferably 2 microns removed from the air, then passes through the outlet duct 17. In the embodiment shown in Figure 3, this air then passes direct to the turbo charger 39 and then to the engine 38.

In this way, particulate removal is achieved without the need for a barrier filter.

Thus, the separator unit has a long life since there are no parts which, under normal circumstances, require regular removal. The barrier filter 14 only requires removal and replacement if the scavenge system is not functioning properly.

There are a number of alterations which may be made to the separator system described above with reference to the drawings. For example, although three separator stages 11, 12, 13 are shown, there may be two separator stages or four or more separator stages. In all cases, the arrangement will be such that each stage after the first adds a pressure drop to the overall pressure drop that is less than the preceding stage.

While the separator system described above with reference to the drawings achieves such a change in pressure drop by altering the helix pitch on the vanes 32, by adjusting the scavenge flow, by adjusting the numbers of inertial separators in each stage and by adjusting the spacing, it will be appreciated these features may be used separately or two or more of them may be used together.

CLAIMS

1. A separator system for separating particulates from air flowing in a path comprising two or more separator stages arranged in succession in the direction
5 of flow of air in said path, each stage including a respective housing containing a plurality of side-by-side inertial separators through which said air flows, the additional total pressure drop produced by each separator stage after the first separator stage being less than the additional total pressure drop produced by the preceding separator stage in an upstream direction.
10
2. A separator system according to claim 1 wherein there are first and second separator stages, the total pressure drop across the first and second stages being less than twice the pressure drop across the first stage.
- 15 3. A separator system according to claim 2 and comprising a third separator stage downstream of the second separator stage in the direction of flow of air in said path, the total pressure drop across the first, second and third separator stages being less than 1.5 times the total pressure drop across the first and second separator stages.
20
4. A separator according to claim 3 and comprising a fourth separator stage downstream of the third separator stage in the direction of flow of air in said path the total pressure drop across the first, second, third and fourth separator stages being less than 1.33 times the total pressure drop across the first, second
25 and third separator stages.
5. A separator system according to any one of claims 1 to 4 wherein each inertial separator includes a vortex generator formed by a helical vane, the pitch of each vane of an upstream stage being greater than the pitch of each vane of a
30 downstream stage.

6. A separator system according to claim 5 wherein the vane pitch is between 45mm and 33mm.

7. A separator system according to any one of claims 1 to 6 wherein the housing of each stage receives a scavenge air flow for removing from the housing particulates separated from said air by the stage, the volume of scavenge air flow supplied to each housing decreasing in a downstream direction.

8. A separator system according to claim 7 wherein the scavenge air flow decreases by equal amounts between stages.

9. A separator system according to any one of claims 1 to 8 wherein each stage includes a different number of inertial separators, the number of inertial separators in each stage decreasing in a downstream direction.

10. A separator system according to claim 9 wherein each stage has, in relation to the succeeding stage in a downstream direction, between 5% and 30% less inertial separators.

11. A separator system according to any one of claims 1 to 10 wherein an un-interrupted flow path is provided between successive stages.

12. A separator system according to any one of claims 1 to 11, and in which there are at least three separator stages, wherein the spacing between the stages is equal.

13. A separator system according to any one of claims 1 to 12 and in which there are at least three separator stages, wherein the spacing between the separator stages is not equal.

14. A separator system according to claim 13 wherein the spacing between separator stages increased in a downstream direction.

5 15. A separator system according to any one of claims 12 to 14 wherein the spacing between adjacent separator stages is between 6mm and 100mm.

16. A separator system according to any one of claim 1 to 15 wherein a barrier filter is provided downstream of the last stage in the direction of flow of said aid in said path.

10

17. A separator system according to claim 16 wherein the barrier filter is formed by a depth filter media.

15 18. A separator system according to any one of claim 1 to 17 wherein the system removes at least 99.5% of particulates in said air and preferably at least 99.7% of said particulates.

19. A separator system substantially as herein before described with reference to the accompanying drawings.

20

20. An air intake for an engine including a separator system according to any one of claim 1 to 19.


21. An engine including an air intake according to claim 20.

25

22. An engine according to claim 21 and including a turbocharger between the air intake and the engine, air flowing from the turbo charger to the engine in an uninterrupted path.

ABSTRACTSEPARATOR SYSTEMS

- 5 A separator system has a plurality of separator stages (11, 12, 13) and operates to remove particulates from air, particularly in the inlet to an engine. Each stage includes a plurality of side-by-side inertial separators (26) through which the air flows and by which particulates are removed. Each stage (11, 12, 13) produces a pressure drop and the additional total pressure drop produced by
- 10 each stage after the first is less than the additional total pressure drop produced by the preceding stage in an upstream direction. This allows particulates to be removed by the separator stages (11, 12, 13) alone without the use, in normal operation, of a barrier filter.

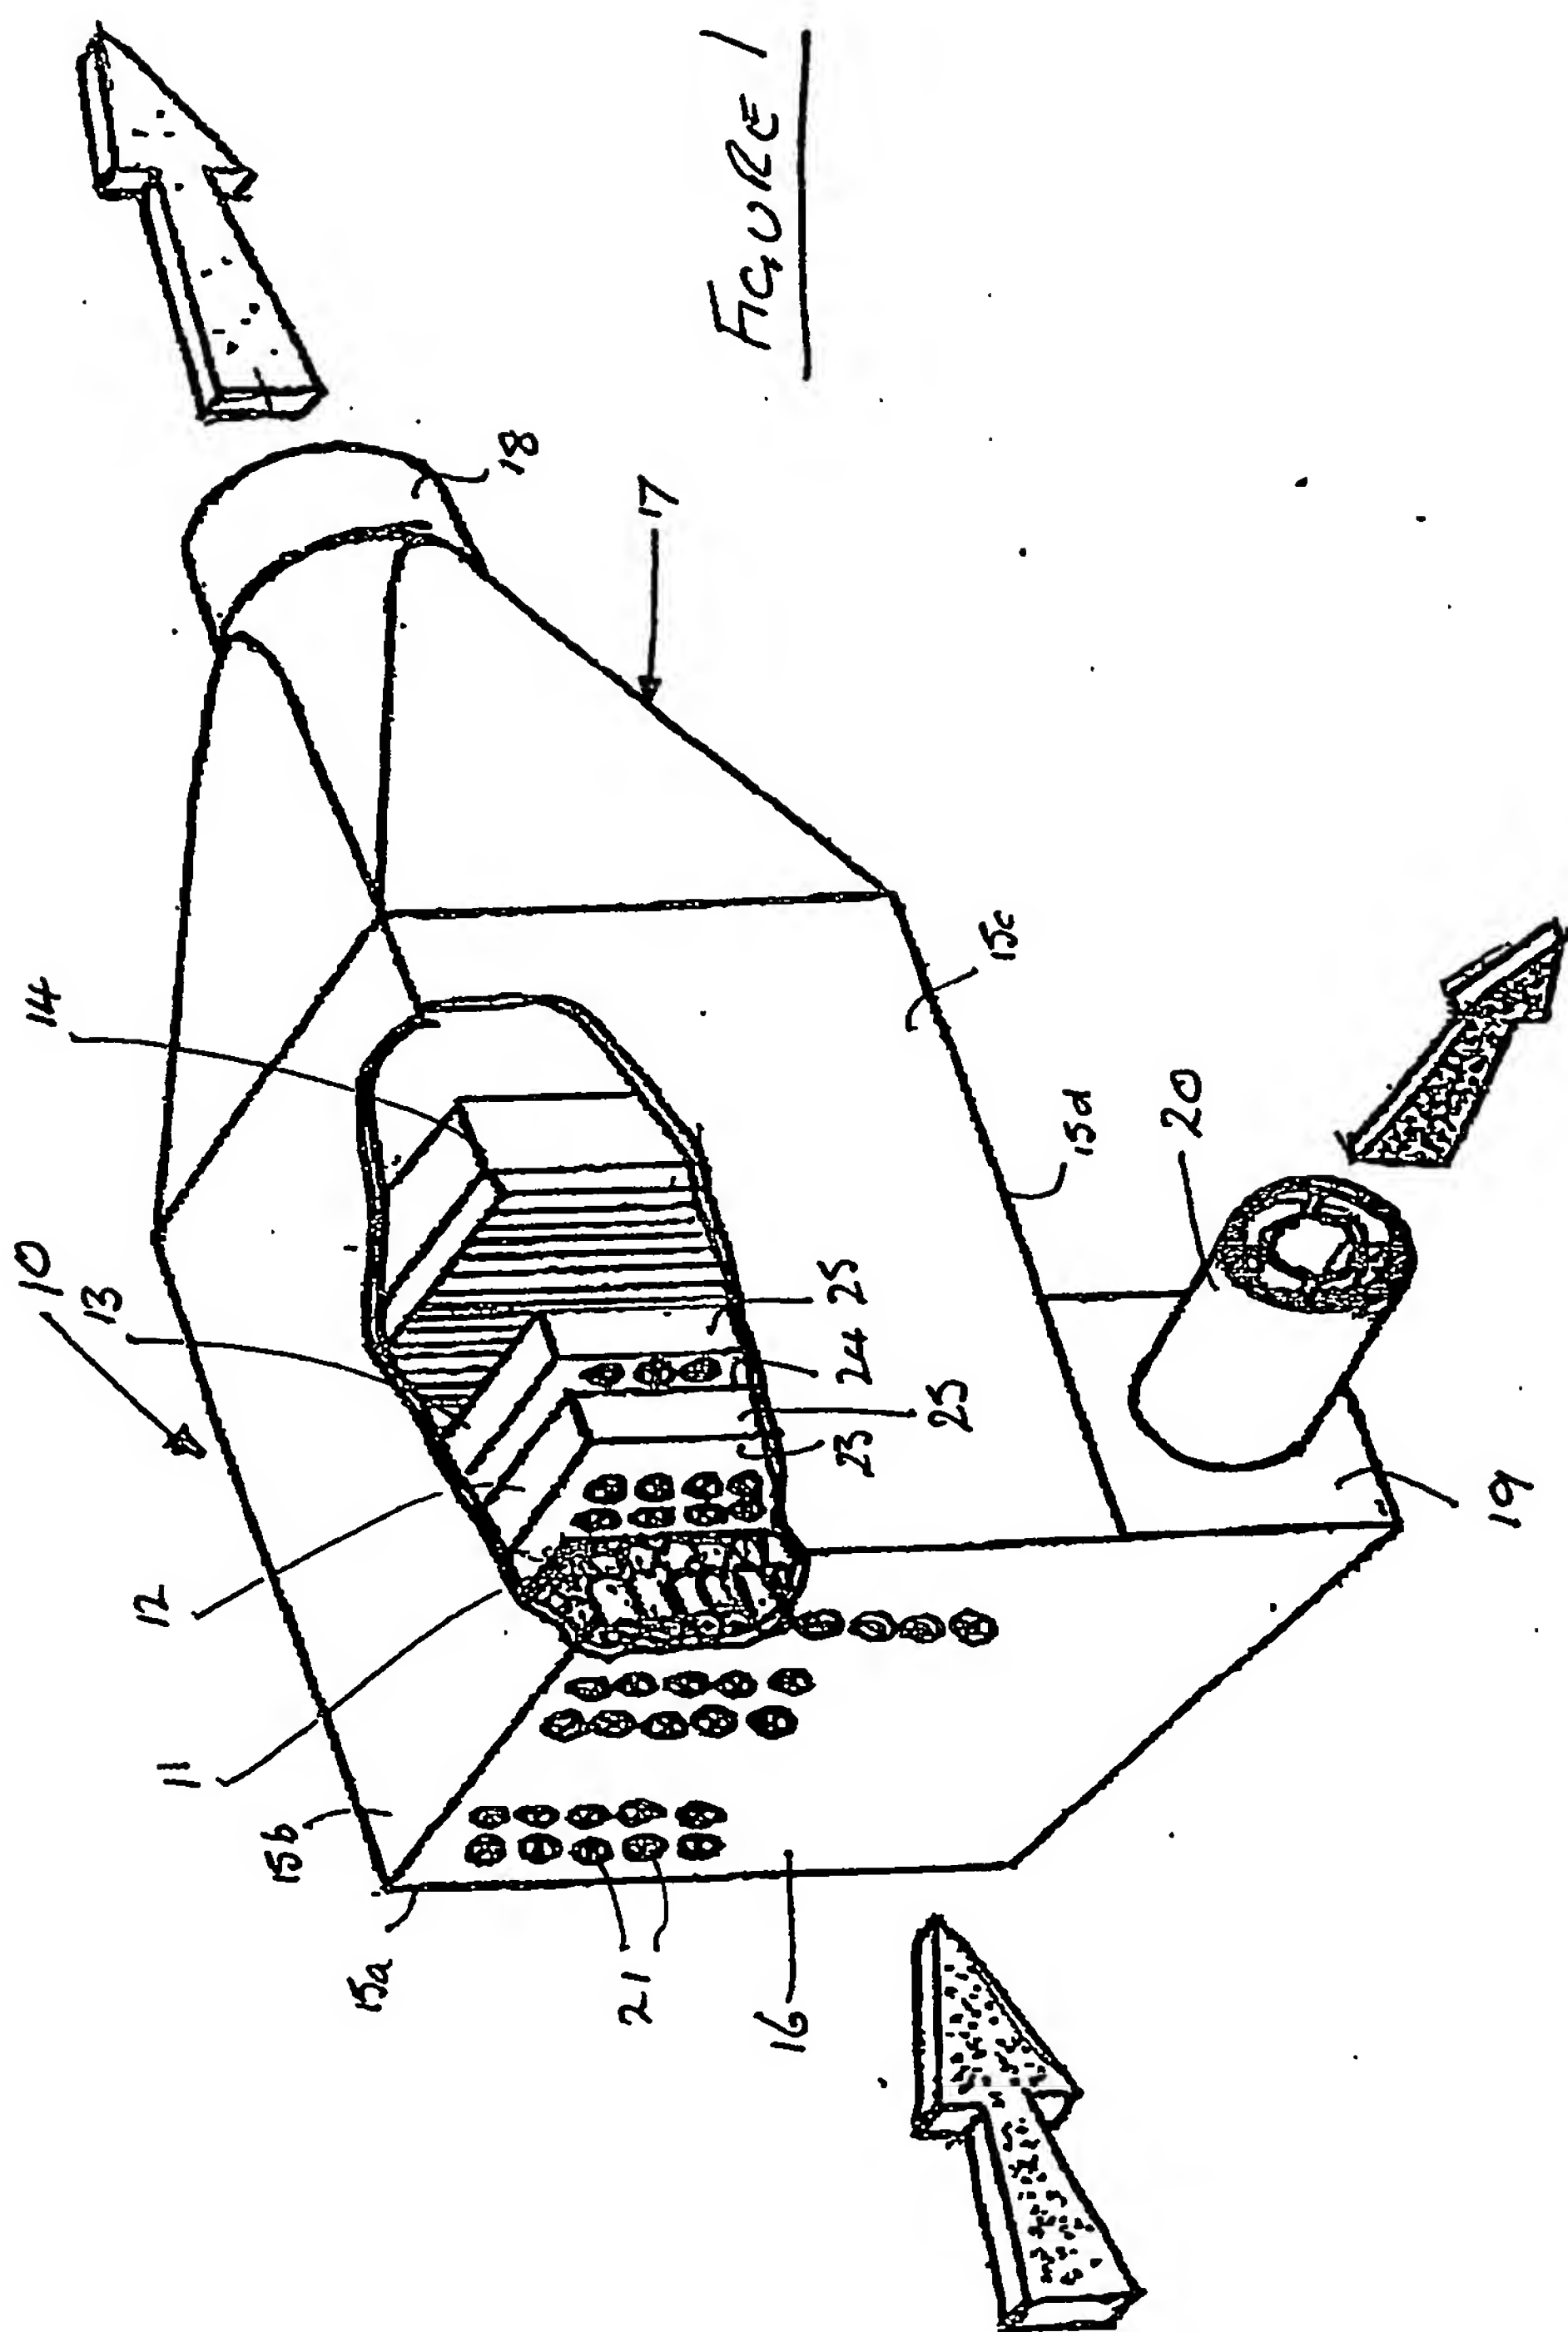

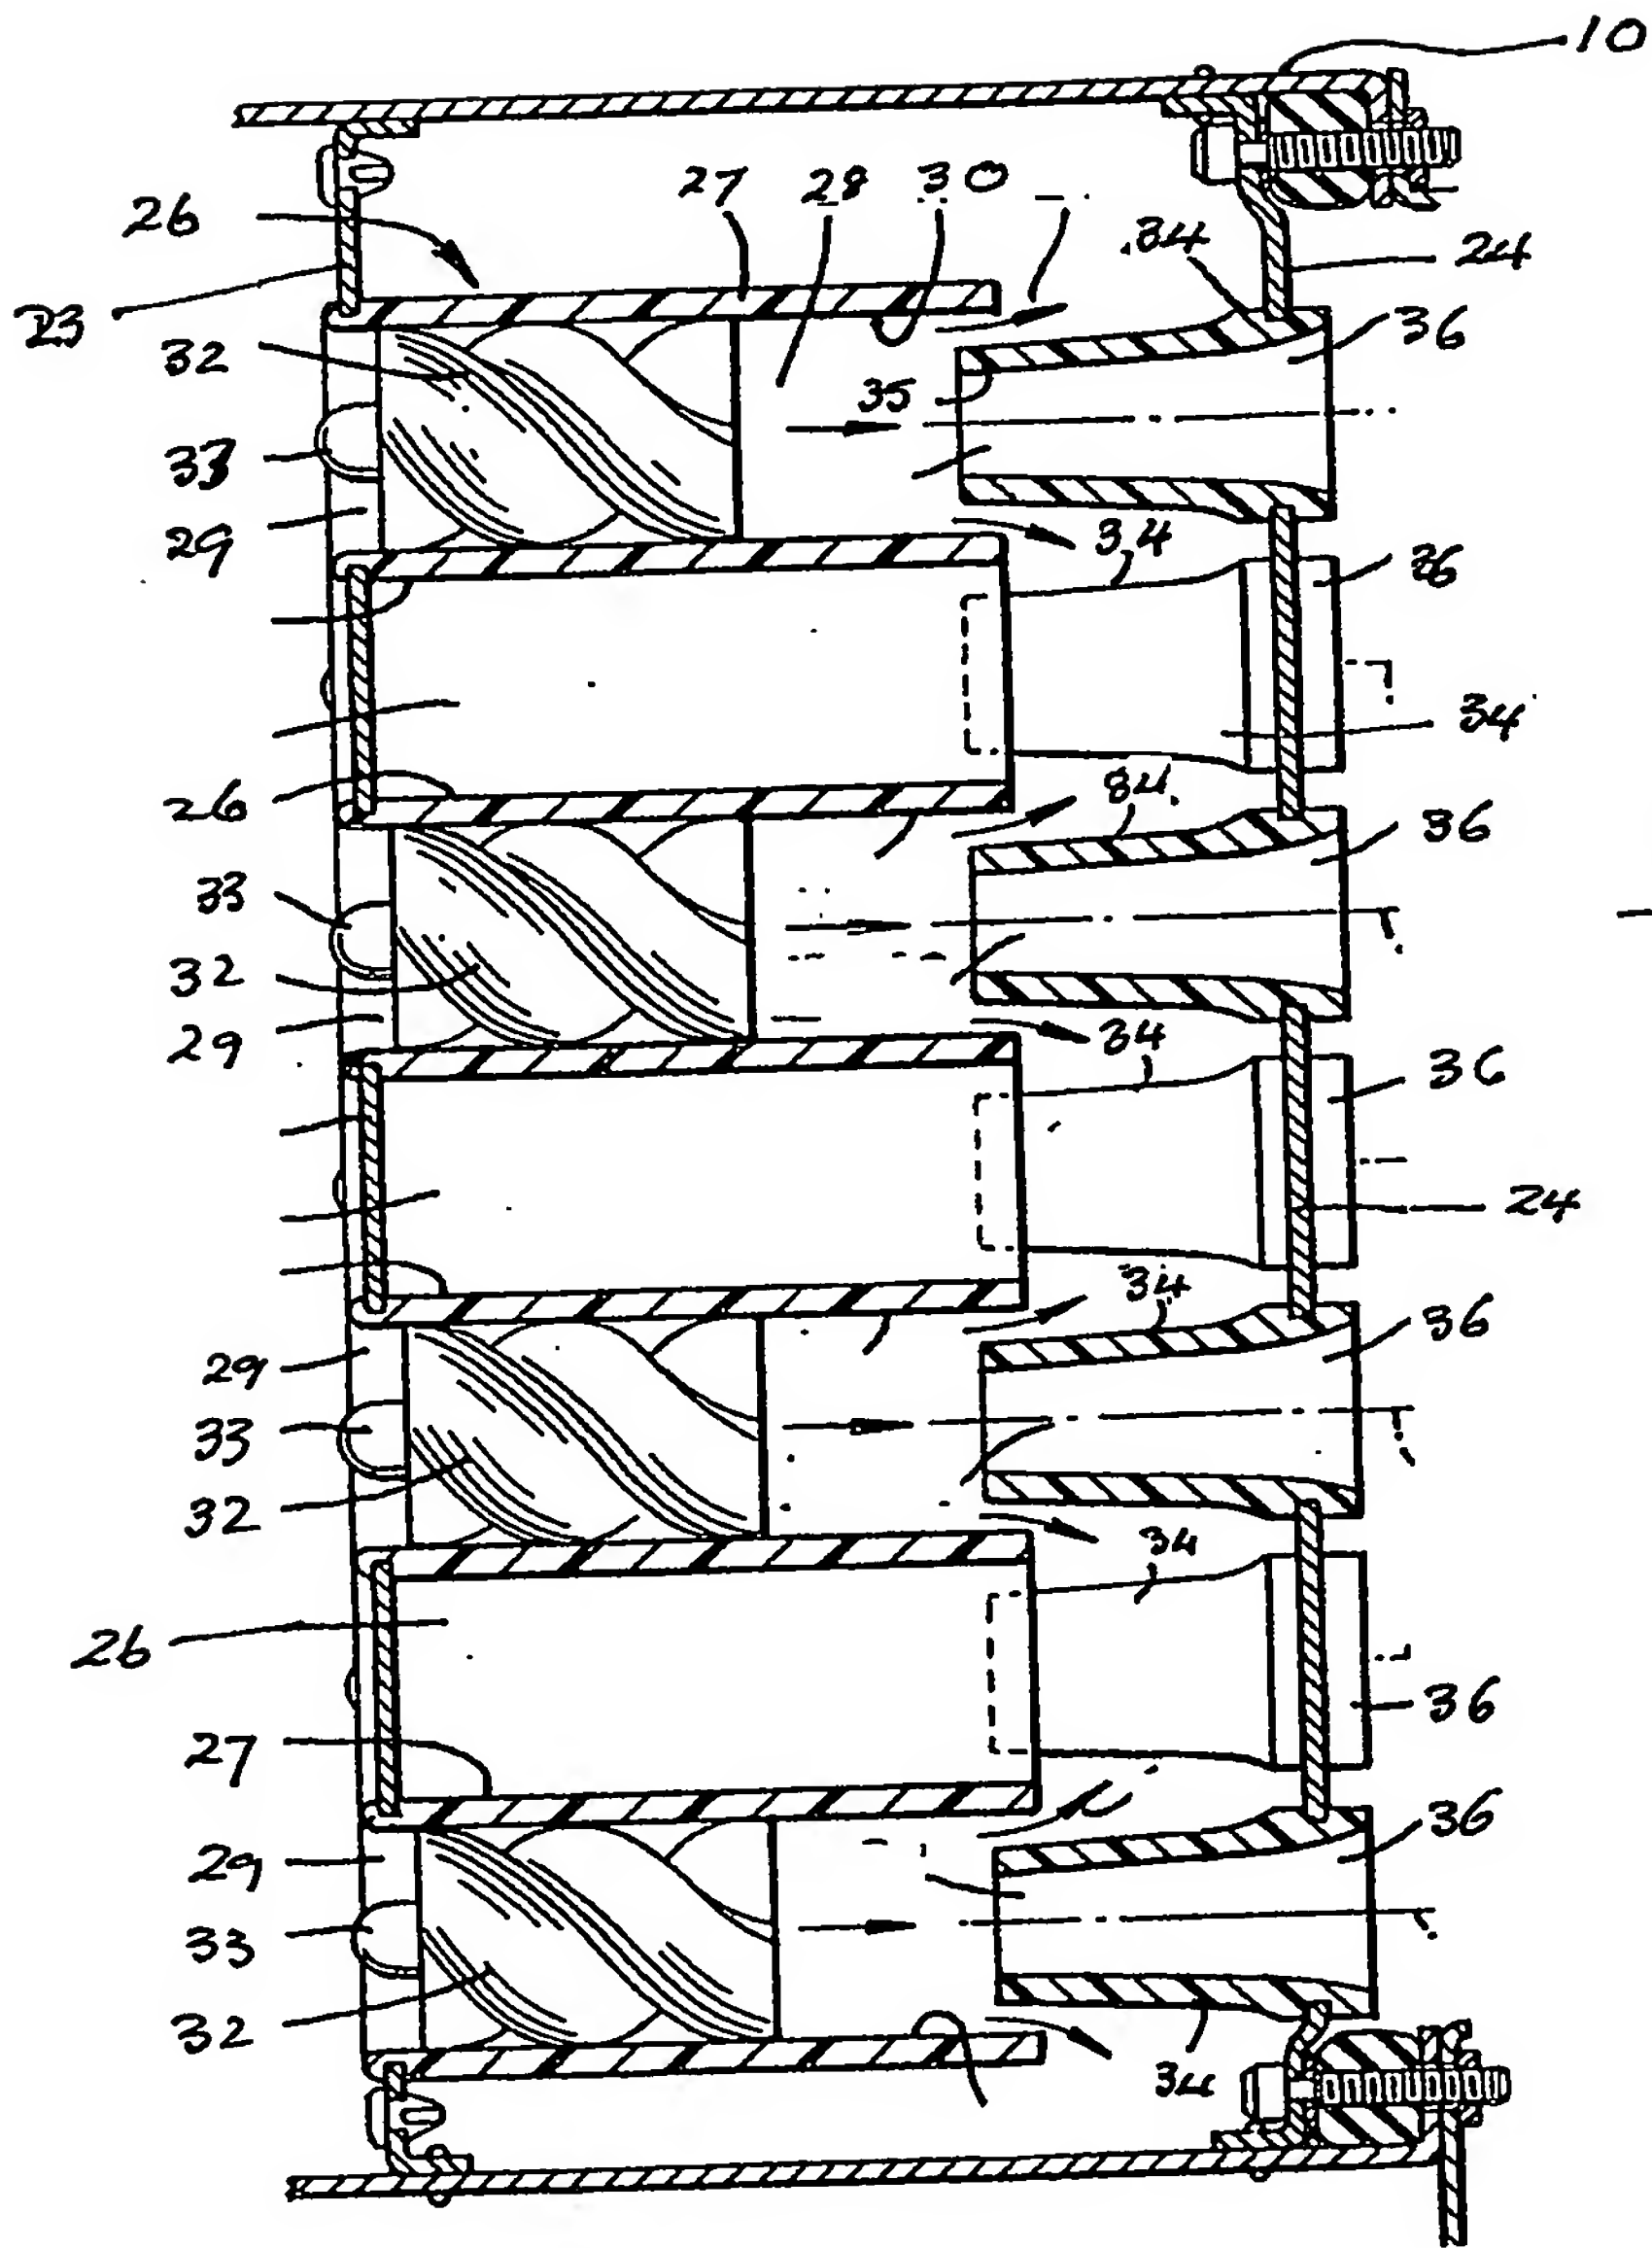


Figure 2

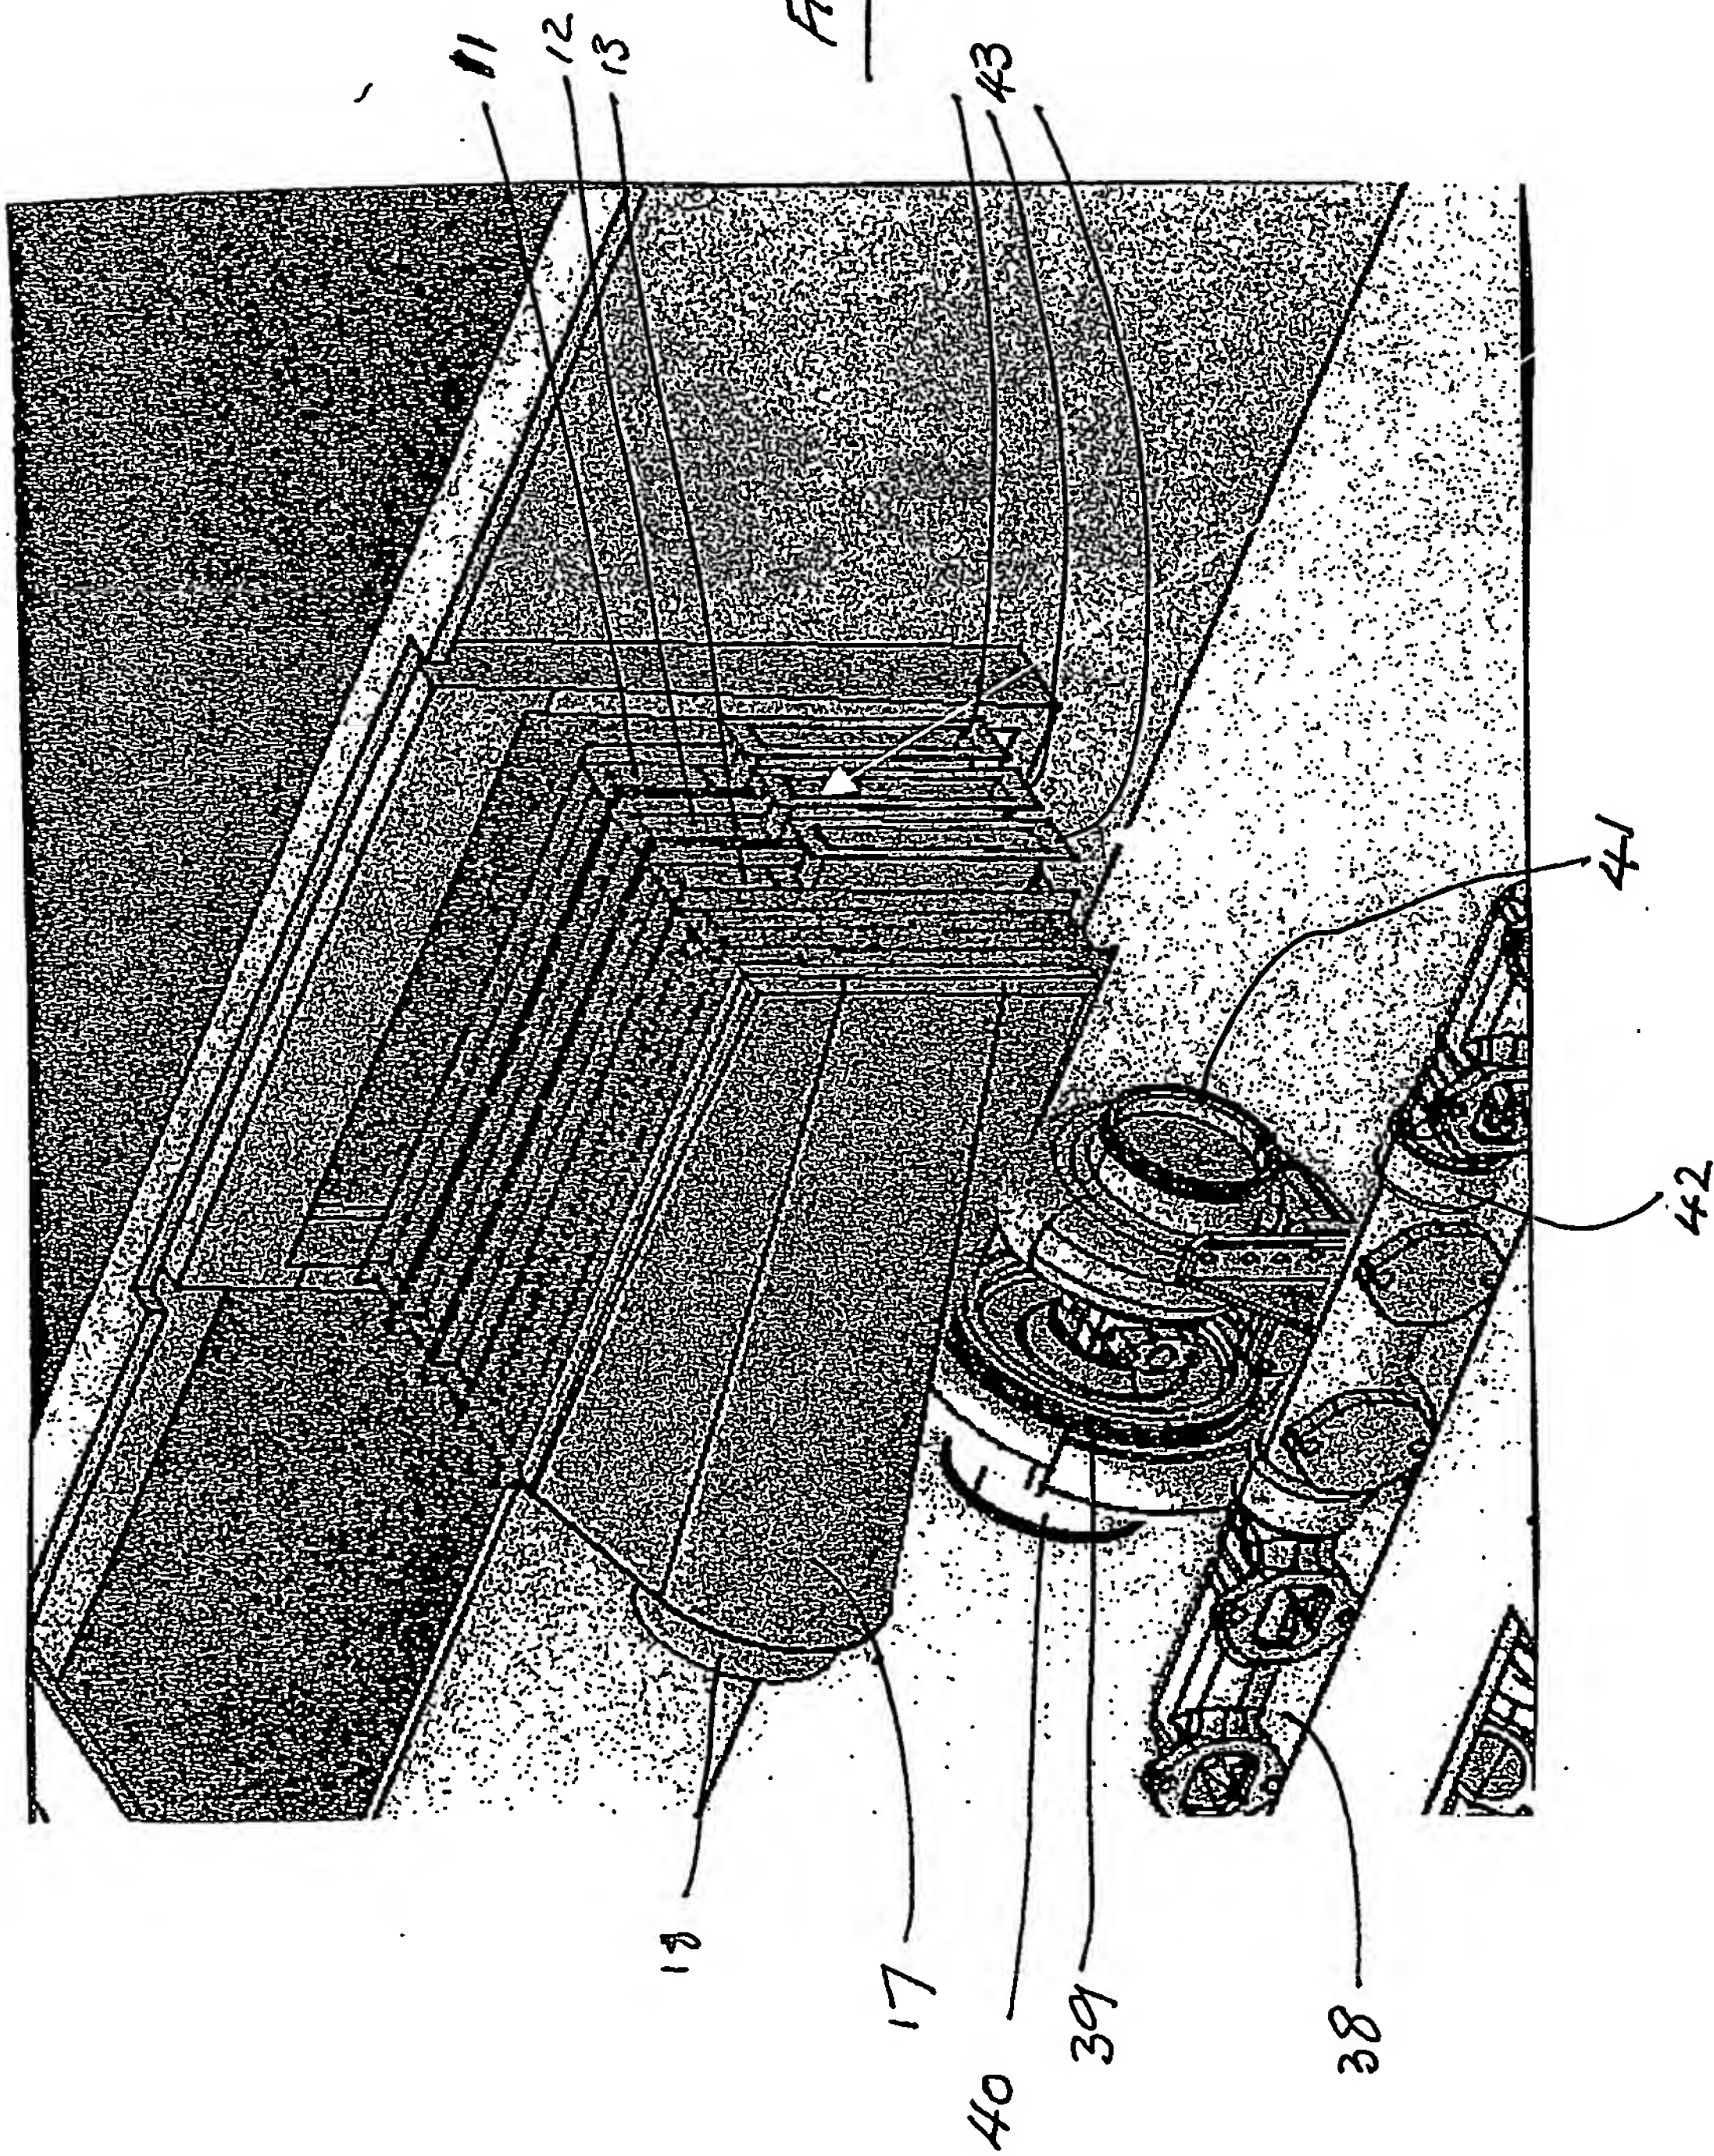


FIGURE 3

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record.

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.